

透明软管



温度：0℃—65℃

用途：产品透明度高，材质环保卫生，能达到食品级的要求。




Article No.	Nominal Dimension	Hose Dimension			W.P.		B.P.		Weight	Packing Dimension
		I.D.	O.D.	Length						
CH Series	Inch	mm		m	bar	psi	bar	psi	kg/m	cm
CH34.8	1/8	3	4.8	200	2	30	6	87	0.014	40x11x15
CH45.8	5/32	4	5.8	150	2	29	5	73	0.018	38x11x15
CH57	3/16	5	7	150	1.5	22	5	73	0.024	41x11x15
CH68	1/4	6	8	100	1.5	22	5	73	0.029	39x11x15
CH810	5/16	8	10	100	1.5	22	4	58	0.037	40x11x15
CH1012	3/8	10	12	100	1.5	22	4	58	0.045	42x11x15
CH1215	1/2	12	15	50	1.5	22	4	58	0.083	42x12x15
CH1518	5/8	15	18	50	1	15	3	45	0.101	42x13x15
CH1922	3/4	19	22	50	1	15	3	45	0.126	56x15x20
CH2530	1	25	30	50	1	15	3	45	0.281	66x16x40
CH3238	1-1/4	32	38	40	1	15	3	45	0.429	65x16x45
CH3844	1-1/2	38	44	40	1	15	2.5	37	0.502	78x20x50
CH5058	2	50	58	40	1	15	2.5	37	0.882	95x20x50

www.jitone.cn

颜色：透明带红色，蓝色，黑色色线

温度：0℃—65℃

用途：质轻，透明性高，弹性好，用于供水、排水、其他液体和气体输送。产品不同的工作压力应用于不同的使用领域。

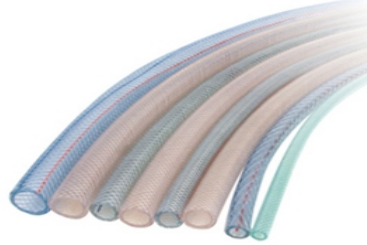

Article No.	Nominal Dimension	Hose Dimension			W.P.	B.P.	Packing Dimension
		I.D.	O.D.	Length			
BR Series	Inch	mm		m	bar	bar	cm
BR 0409	5/32	4	9	100	12	50	23x15x15
BR 0610	1/4	6	10	100	10	30	23x15x15
BR0611		6	11	100	10	30	34x15x15
BR0812	5/16	8	12	100	7	21	34x15x15
BR0813		8	13	100	10	30	37x15x15
BR0914	3/8	9	14	100	10	30	42x15x15
BR1014		10	14	100	5	25	42x15x15
BR1015		10	15	100	9	28	43x15x15
BR1216	1/2	12	16	100	7	21	46x16x15
BR1217		12	17	100	8	24	48x16x20
BR1317		13	17	100	5	15	47x16x15
BR1318		13	18	100	8	25	43x18x20
BR1620	5/8	16	20	50	5	15	47x15x20
BR1621		16	21	50	8	24	48x15x20
BR1924	3/4	19	24	50	6	18	59x14x20
BR1925		19	25	50	8	24	59x15x25
BR2530	1	25	30	50	5	16	67x19x30
BR2531		25	31	50	6	18	59x21x20
BR3238	1-1/4	32	38	50	4	16	75x22x45
BR3239		32	39	50	5	26	85x23x50
BR3845	1-1/2	38	45	40	4	15	88x20x45
BR3846		38	46	40	5	20	90x25x50
BR5059	2	50	59	30	3	13	100x20x50
BR5060		50	60	30	4	17	100x30x60